



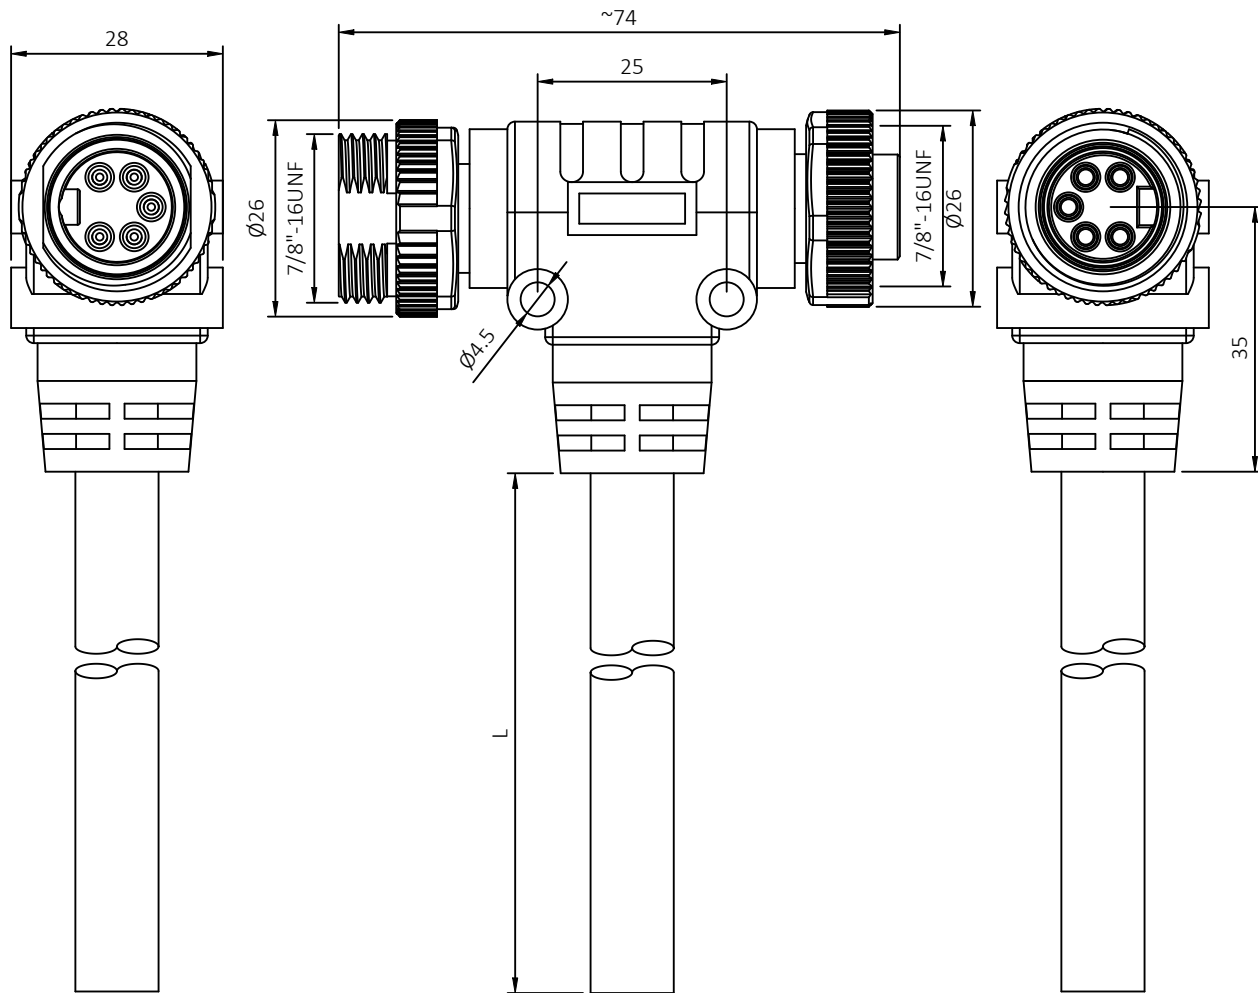

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/01/01	JIM.KING

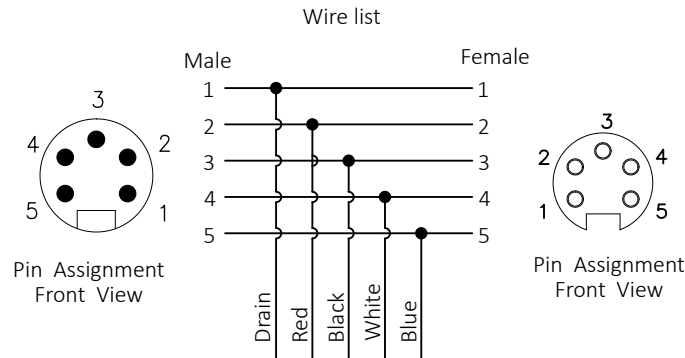

**General Specifications:**  
 Connector 1: 7/8"-16UNF 5P Female  
 Connector 2: 7/8"-16UNF 5P Male  
 Locking: Screw Connection  
 Termination: Solder Cup

**Electrical:**  
 Rated Voltage: 300V AC/DC  
 Rated Current: 8A  
 Contact Resistance: ≤5mΩ  
 Insulation Resistance: ≥100MΩ

**Mechanical:**  
 Mating Cycles: min 500  
 Temperature Range: -25 to 80° C  
 Degree of Protection: IP67

**Material:**  
 Coupling nut/screw: Zinc Alloy, Electroless Nickel  
 Insulator: TPU black  
 Contacts: Brass, Gold Plated  
 Seal: Rubber, black  
 Body Molding: PVC, Yellow  
 CAN-BUS Cable: (18#\*1P+AL)+(16#\*1P+AL)+Drain+AL+Braid , PUR jacket, Grey

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	东莞市德索精密工业有限公司 <small>CONNECTOR &amp; CABLE ASSEMBLY</small>				
	PART DESCRIPTION: 7/8" T-Splitter, 7/8" 5P Male-Female With cable				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM.KING	P/N: RHT-634-3395			
	Check:	Date: 2024.01.01	Scale: Free	Unit: MM	Type: Z
	Draw: DING	Date: 2024.01.01	Scale: Free	Unit: MM	Type: Z
					Page: 1/1