




ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/01/01	JIM.KING


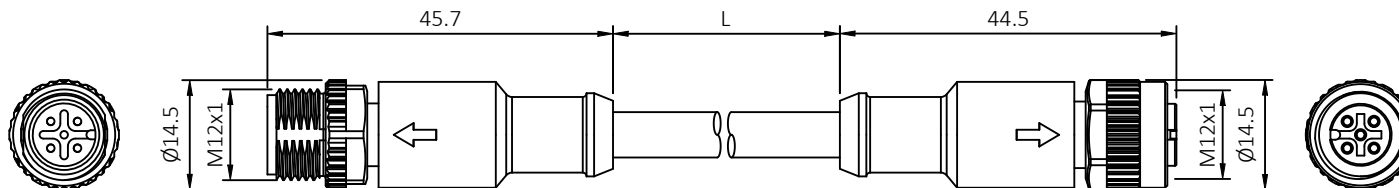


General Specifications:
 Comply with IEC61076-2-101
 Connector 1: M12 5P Female
 Connector 2: M12 5P Male
 Locking: Screw Connection
 Termination: Solder Cup

Electrical:
 Rated Voltage: 60V AC/DC
 Rated Current: 4A
 Contact Resistance: $\leq 5m\Omega$
 Insulation Resistance: $\geq 100M\Omega$

Mechanical:
 Mating Cycles: min 500
 Temperature Range: -25 to 80° C
 Degree of Protection: IP67

Material:
 Coupling nut/screw: Zinc Alloy, Electroless Nickel
 Insulator: PA66 UL94-V0 black
 Contacts: Brass, Gold Plated
 Seal: FKM, Green
 Body Molding: PVC, Blue
 CAN-BUS Cable: (24#*1P+AL)+(22#*1P+AL)+Drain+AL+Braid ,PUR jacket, Violet




Wire list

CONN.	CONN2	Wire color	
1	1	Drain(22AWG)	Twist
2	2	Red(22AWG)	
3	3	Black(22AWG)	
4	4	White(24AWG)	Twist
5	5	Blue(24AWG)	

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm 0.20mm$
8 - 30mm $\pm 0.25mm$
30 - 120mm $\pm 0.30mm$

dosinconn 东莞市德索精密工业有限公司
CONNECTOR & CABLE ASSEMBLY



PART DESCRIPTION:
M12 5PIN Male to Female

Appr: JIM.KING

P/N: RHT-634-3407

Check:

Date	Scale	Unit	Type	Page
2024.01.01	Free	MM	Z	1/1

Draw: DING